




DIY Polycarbonate Roof Panels

- Easy DIY installation
- No specialist tools required
- Light weight
- Impact resistant

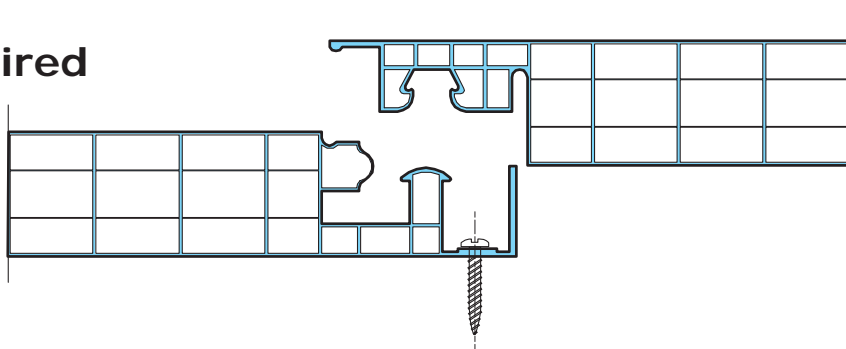

Freephone: 0800 AMPELITE (0800 267 354)
79 Captain Springs Rd, Onehunga, Auckland
www.ampelite.co.nz



EasyClick PC is an ideal option for glazing and roofing in Patios, Greenhouses, Carports, Pool Enclosures, Office Partitions and more. EasyClick PC is the perfect product for the home handyman.

Assembly of EasyClick PC is so simple that it can easily be installed with standard tools. Cut panels to desired length, screw in place, snap in next panel and repeat, finish with aluminium EasyClick PC End Cap.

It's 4 wall construction is thermally efficient and offers high light transmission. Acting like a sunblock, it is opaque to UV rays, protecting patio furniture, vehicles, etc. from the harmful effects of the sun.




DIY Polycarbonate Roof Panels

Installation Guide

- **Easy Handling**
- **Light Weight**
- **Quick Assembly**
- **Outstanding Light Transmission with UV protection**
- **Thermally Efficient 4-wall construction**
- **Strong**
- **Highly Impact Resistant**
- **Waterproof**



Cut to the required size.

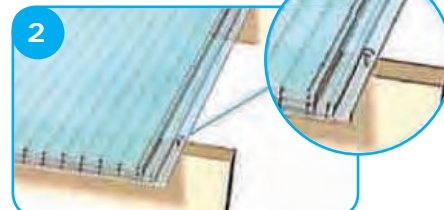

Secure the panel onto each batten with a screw.



Match the next sheet edges carefully and press into place with a "click."




Apply a border of aluminum EasyClick PC End Cap, in conjunction with a bead of Polycarbonate compatible sealant to finish the edges.

EasyClick PC SPECIFICATIONS


Thickness	16mm
Width	250mm
Lengths	2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5m
Colours	Clear, Opal, Grey
UV Protection	One Side
Light Transmission	Clear – 80%, Opal – 50%, Grey – 40%
Shade Factor	Clear – 2, Opal – 6, Grey – 7 <small>Shade factors shown provide an indication of the heat absorbed or reflected by the EasyClick sheet. The 4 walls and hammered glass finish provide exceptional performance in comparison with single layered sheeting.</small>
Thermal Insulation	$U = 2.1 \text{ W/m}^2\text{K} / R = 0.48\text{m}^2 \text{ k/w}$
End Cap Lengths	3.0m and 6.0m
Screws	Wafer 30mm C3 T17 Timber Wafer 22mm C3 Tek Steel
Shade Factor Key	0 = Full Light, 10 = Full Shade

EasyClick PC LOADING DATA

Distance: Max. 1200mm between battens
Fall: Min. 5°

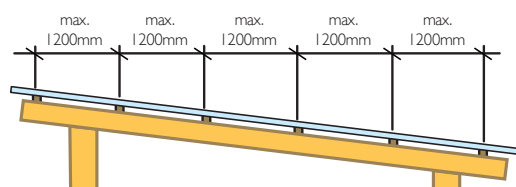

EasyClick PC Profile

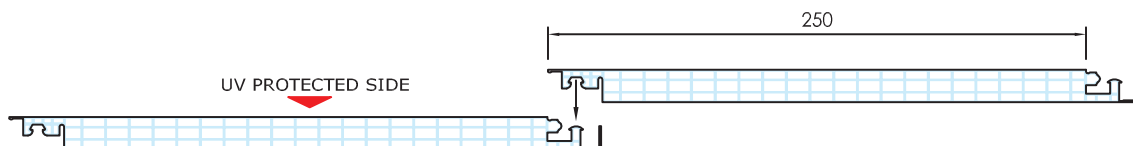

For more information on full warranty details, new products or installation instructions, please visit www.ampelite.co.nz



Freephone: 0800 AMPELITE (0800 267 354)
79 Captain Springs Rd, Onehunga, Auckland
www.ampelite.co.nz

